



GERAND ENGINEERING

9431 SCIENCE CENTER DRIVE, NEW HOPE MN 55428
952.374.1320 WWW.GERAND.COM

FIRE PUMP TEST METER G-1250-6

CONSTRUCTION & SPECIFICATIONS

VENTURI: ZINC PLATED STEEL

VALVES: ONE PIECE BRASS BODY
ZINC DIECAST STEEL HANDLE

HOSES: 3/16" NYTRILE CORE, POLYESTER
BRAID AND EPDM SYNTHETIC COVER

METER DATA

CONSTRUCTION: ALUMINUM BODY

OPERATION: BUNA "N" DIAPHRAGM

ACCURACY: ±2.0%

TEMPERATURE: 200° F MAX

PRESSURE: 1500 PSI MAX


APPROX. WEIGHT: 3 LBS/EACH

4 1/2" DIAL STANDARD - 6" AVAILABLE

WEIGHTS & DIMENSIONS

WEIGHT: 17 LBS

SHIPPING DIMENSIONS: 13" x 13" x 13" BOX

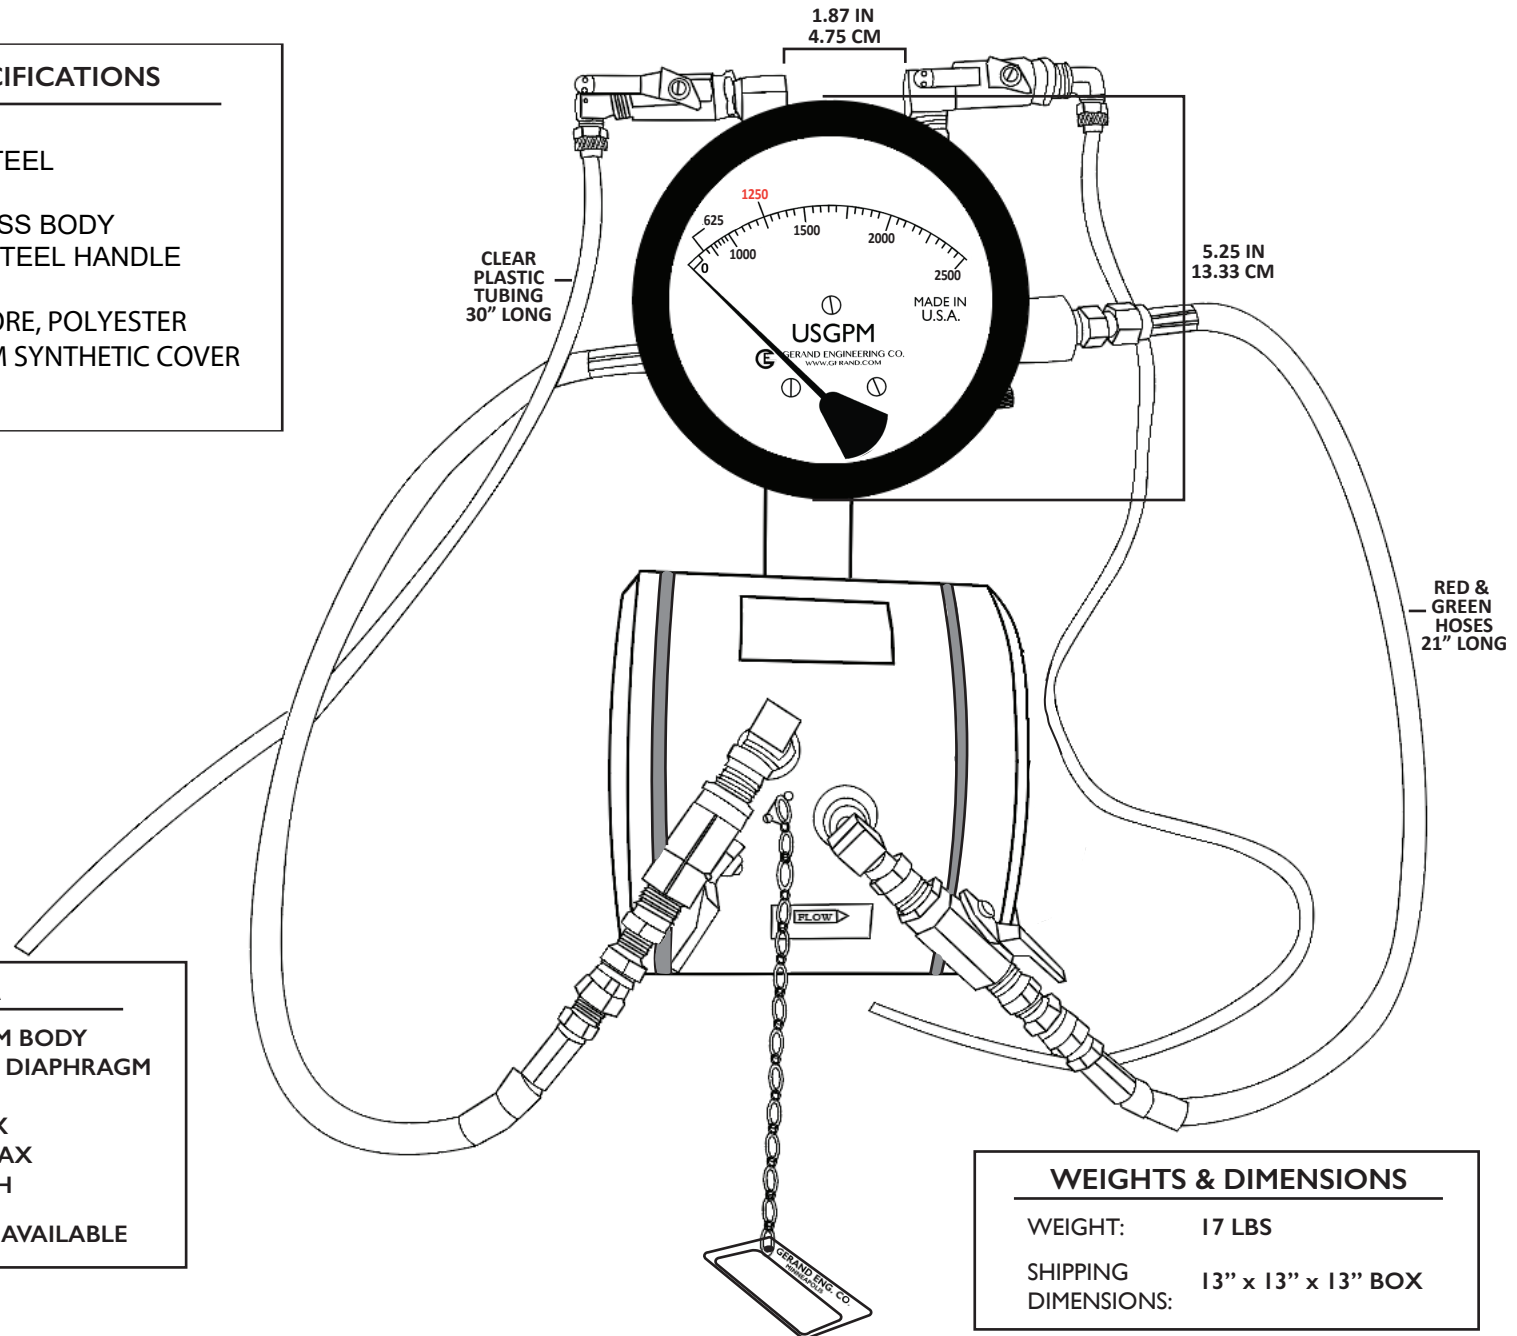

CLEAR
PLASTIC
TUBING
30" LONG

1.87 IN
4.75 CM

5.25 IN
13.33 CM

RED &
GREEN
HOSES
21" LONG

FLOW

GERAND ENG CO
G-1250-6